


absorbALL Extender

absorbALL 1250

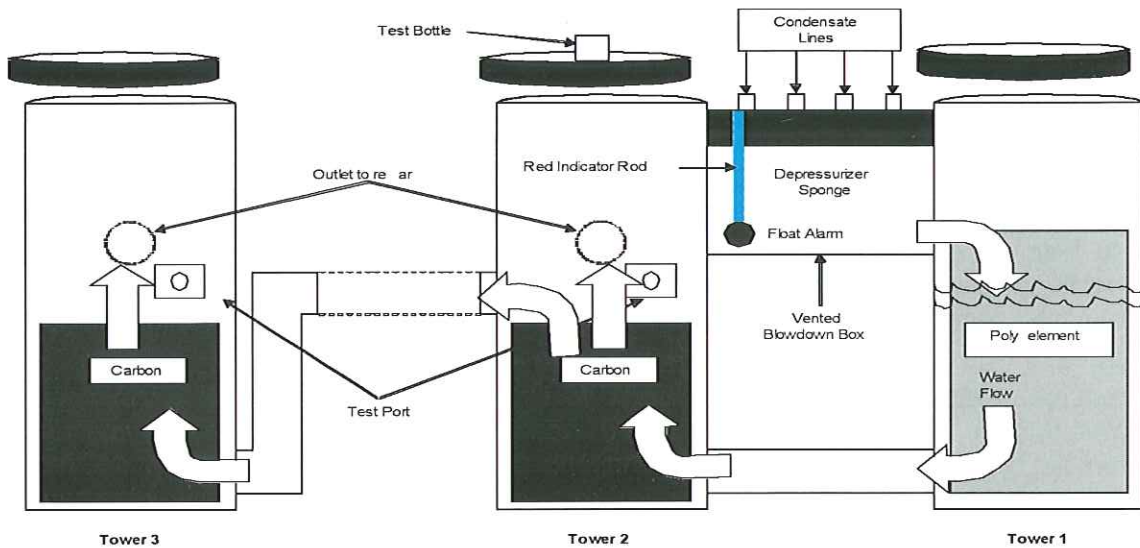

| | Enviro | 520 | 750 | 1250 | Extender |
|-------------------------------|---------------------------|------------|------------|-------------|-----------------|
| Target output value | <20 ppm | <20 ppm | <20 ppm | <20 ppm | <20 ppm |
| Activated carbon elements | 1 each | 1 each | 1 each | 1 each | 2 each |
| Inlet connections | ¼", 3/8", ½" (3 total) | ½" (2 ea) | ½" (2 ea) | ½" (4 ea) | ½" (2 ea) |
| Outlet connection | ½" | ½" | ½" | ½" | ½" |
| TEST valve | yes | yes | yes | yes | yes |
| Service drain | yes | yes | yes | yes | yes |
| Overflow Indicator | no | yes | yes | yes | yes |
| Housing material | PE | PE | PE | PE | PE |
| Total recyclable | yes | yes | yes | yes | yes |
| Polyglycol coolants | no | yes* | yes* | yes* | yes* |
| Max. compressor capacity** | 65 cfm | 300 cfm | 750 cfm | 1250 cfm | 1500/2500 cfm |
| Dimensions (inches) Height | 27.75 | 26.20 | 38 | 45.47 | 34.43 |
| Width | 10.25 | 27.56 | 32 | 41.00 | 34.05 |
| Depth | 10.75 | 11.81 | 16 | 17.12 | 15.35 |
| Weight (pkg.w/out pallet) | 11 lbs | 50 lbs | 109 lbs | 130 lbs | 84 lbs |

Typical absorbALL Properties

All absorbALL models can accept condensate discharge from intelligent drains, timer drains, float drains and manual drains. Additional condensate can be manually added.

Capacity may be less with ATF, Polyglycol, or Silicone.

* A special polyelement is required for removal of polyglycol coolants. **Capacity at 125 psi. Higher pressures may create more stable emulsions and make separation more difficult or impossible.